


The category C buffer meets the requirements of UIC 526–1 and standard EN15551

- C119.C105EC001-buffer disk 450 standard
- C119.C105EC002-buffer disk 450 hardened
- C119.C105EC003-buffre disk 550 standard
- C119.C105EC004-buffer disk 550 hardened
- C119.C105EC005-buffer disk 450 with polymer insert
- C119.C105EC006-buffer disk 550 with polymer insert

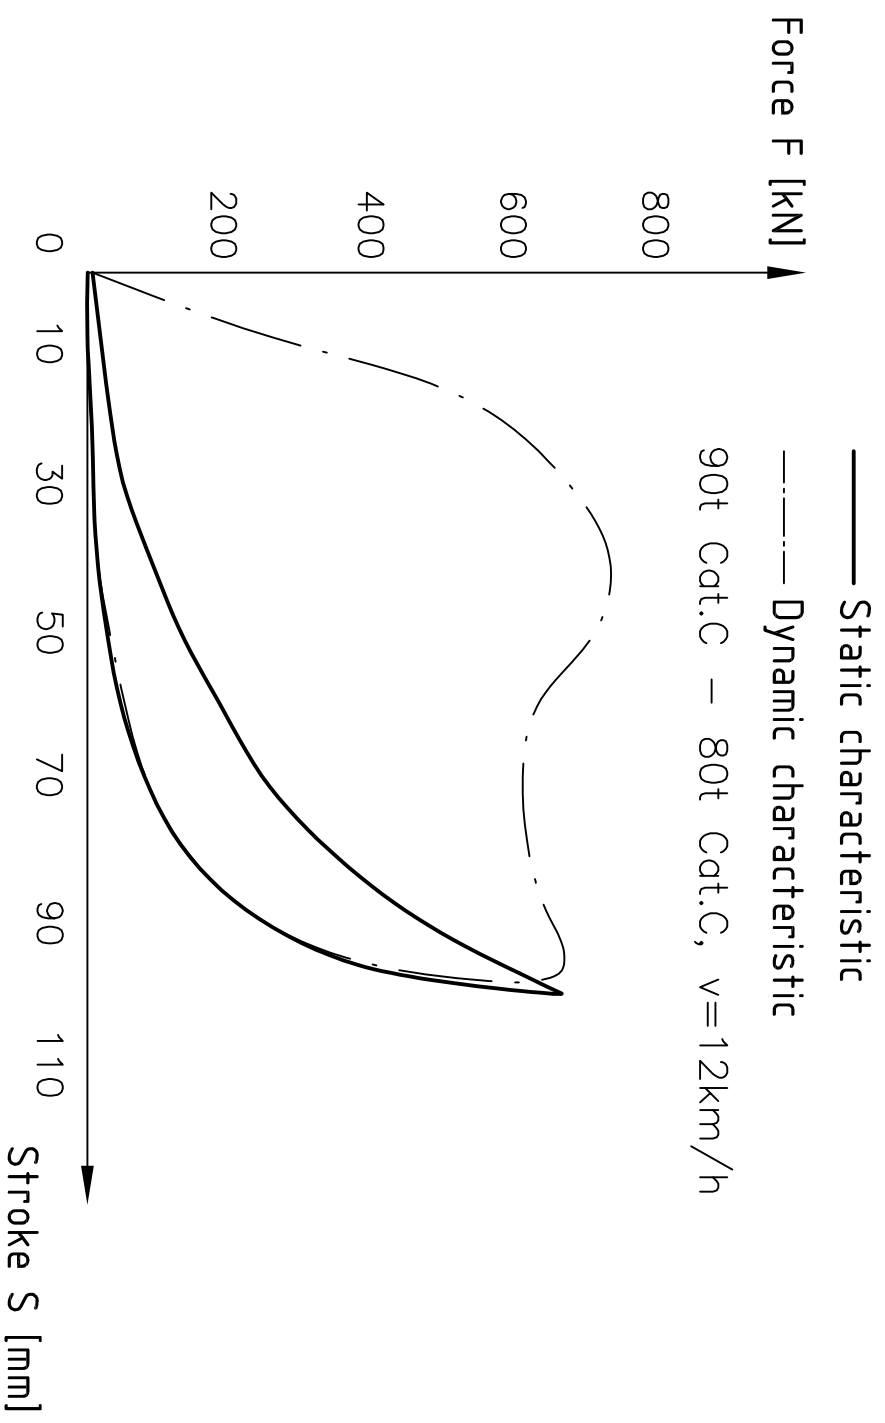

Technical parameters		static	dynamic
Stroke	(mm)	105	105
Initial force	(kN)	20	20
End force	(kN)	650	760
Capacity	(kJ)	20	>70

Buffer Keystone type Combigard E 105

AXTONE
RAILWAY COMPONENTS

Offer drawing

No.: C112.C105EC001 C119.A105EC003 C119.A105EC005
C112.C105EC002 C119.A105EC004 C119.A105EC006