


The category C buffer meets the requirements of UIC 526-1 and standard EN15551

- Static characteristic
  - Dynamic characteristic
- 90t Cat.C – 80t Cat.C,  $v=12\text{km/h}$
- C112.C105MC002-buffer disk 450 standard
  - C112.C105MC004-buffer disk 450 hardened
  - C112.C105MC006-buffer disk 550 standard
  - C112.C105MC010-buffer disk 450 with polymer insert

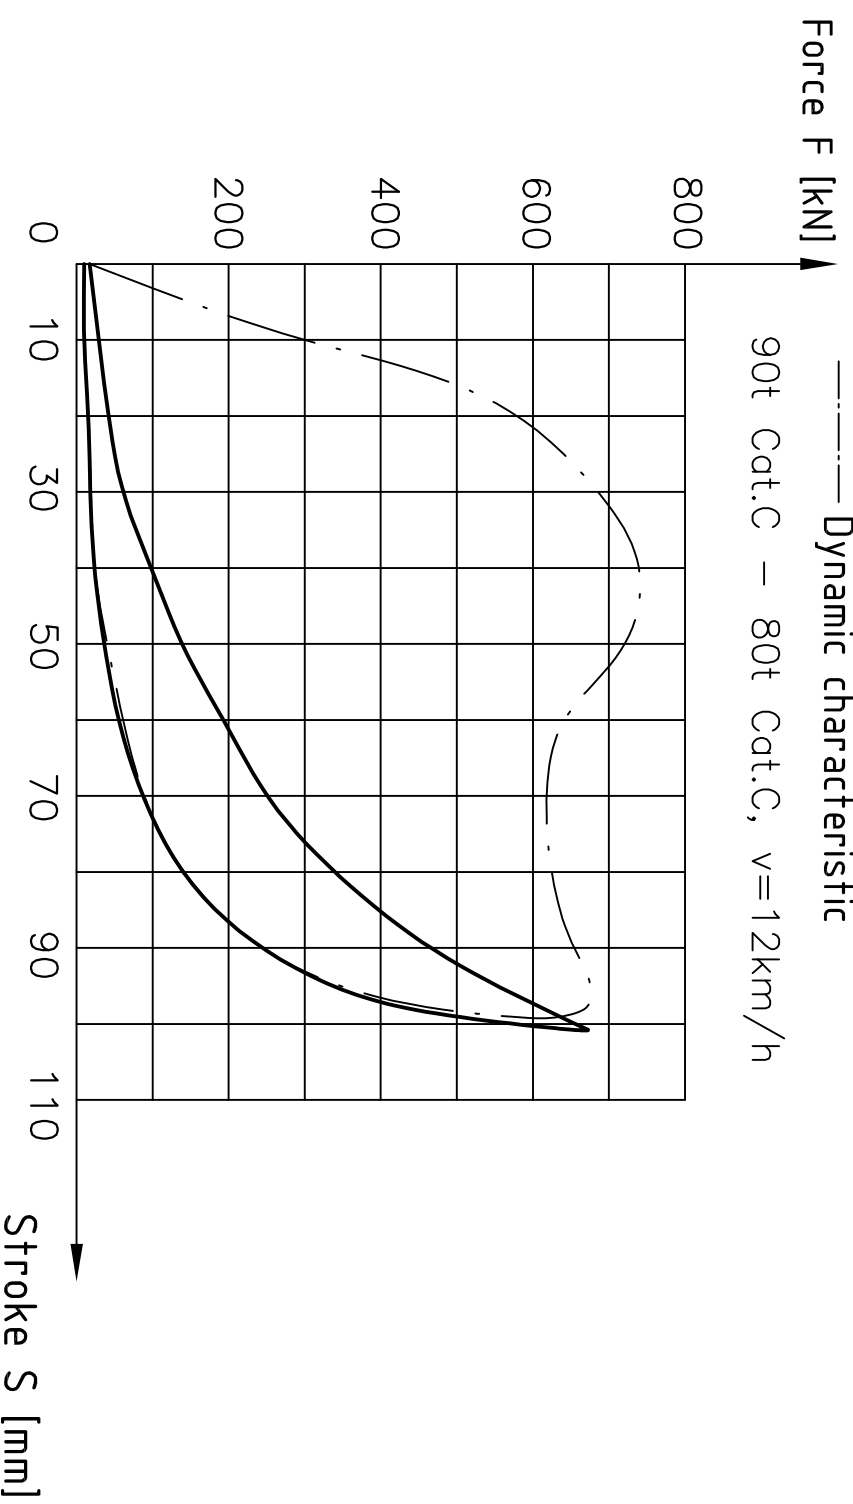

Technical parameters		static	dynamic
Stroke	(mm)	105	105
Initial force	(kN)	25	25
End force	(kN)	690	760
Capacity	(kJ)	20	>70

Buffer Keystone type Combigard T105

**AXXTONE**  
RAILWAY COMPONENTS

Offer drawing

No.: C112.C105MC002 C112.C105MC006  
C112.C105MC004 C112.C105MC010